

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau


## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

|   |  |  |   |
|---|--|--|---|
| (51) International Patent Classification <sup>6</sup> :<br><b>H04B 1/707, 7/26</b>  |  | A1   | (11) International Publication Number:<br><b>WO 99/37037</b>    |
|   |  |  | (43) International Publication Date:<br>22 July 1999 (22.07.99) |
| (21) International Application Number:<br><b>PCT/US99/00909</b>   |  | (81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). |   |
| (22) International Filing Date:<br>15 January 1999 (15.01.99)   |  |  |   |
| (30) Priority Data:<br>09/008,203 16 January 1998 (16.01.98) US   |  |  |   |
| (71) Applicant: QUALCOMM INCORPORATED [US/US]; 6455 Lusk Boulevard, San Diego, Ca 92121 (US).   |  |  |   |
| (72) Inventors: WHEATLEY, Charles, E., III; 2208 Caminito del Barco, Del Mar, CA 92014 (US). TIEDEMANN, Edward, G., Jr.; 4350 Bromfield Avenue, San Diego, CA 92122 (US). |  |  |   |
| (74) Agents: OGROD, Gregory, D. et al.; Qualcomm Incorporated, 6455 Lusk Boulevard, San Diego, CA 92121 (US).   |  | Published<br>With international search report.   |   |

(54) Title: MOBILE STATION ASSISTED TIMING SYNCHRONIZATION IN A CDMA COMMUNICATION SYSTEM

## (57) Abstract

In the present invention, the slave base station (64) attains synchronization with the reference base station (62) through messages (504) transmitted from and received by a mobile station (60) either in the soft handoff region between the reference base station (62) and the slave base station (64) or within a range which allows the mobile station (60) to communicate with the slave base station (64). When the mobile station (62) is not in communication with both the reference base station and the slave base station (62), then the round trip delay between the mobile station and the reference base station is measured by the reference base station (62). The reference base station (62) communicates the PN code used by the mobile station over the reverse link to the slave base station. The slave base station (64) acquires the signal (504) from the mobile station (60) and determines when the signal from the mobile station arrives. The slave base station (64) then makes and estimates as to the length of the delay between transmission of a signal from the mobile station (60) to the slave base station (64). Based upon these measurements and estimates, the slave base station (64) determines the error which is present in the slave base station system time.

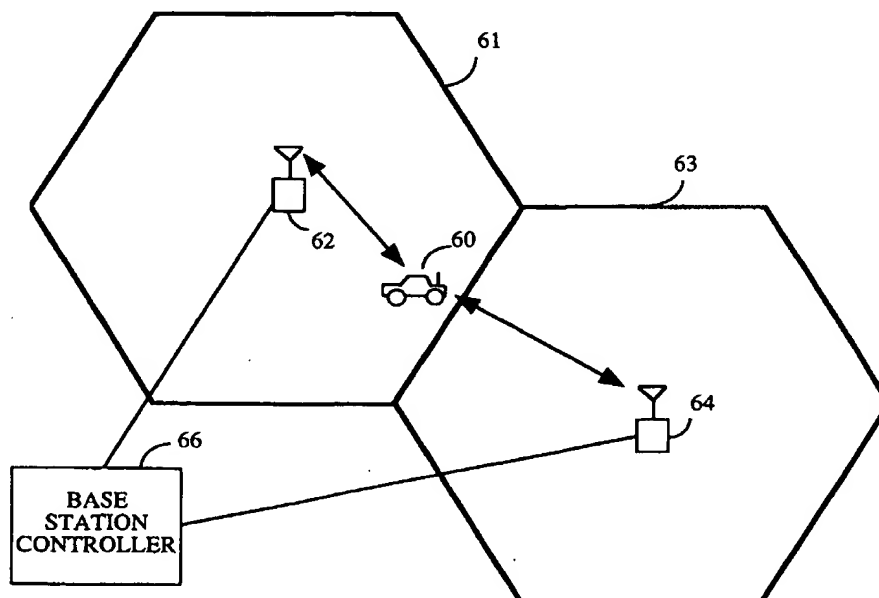

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

|    |                          |    |  |    |  |    |                          |
|----|--------------------------|----|--|----|--|----|--------------------------|
| AL | Albania                  | ES | Spain                                    | LS | Lesotho                                      | SI | Slovenia                 |
| AM | Armenia                  | FI | Finland                                  | LT | Lithuania                                    | SK | Slovakia                 |
| AT | Austria                  | FR | France                                   | LU | Luxembourg                                   | SN | Senegal                  |
| AU | Australia                | GA | Gabon                                    | LV | Latvia                                       | SZ | Swaziland                |
| AZ | Azerbaijan               | GB | United Kingdom                           | MC | Monaco                                       | TD | Chad                     |
| BA | Bosnia and Herzegovina   | GE | Georgia                                  | MD | Republic of Moldova                          | TG | Togo                     |
| BB | Barbados                 | GH | Ghana                                    | MG | Madagascar                                   | TJ | Tajikistan               |
| BE | Belgium                  | GN | Guinea                                   | MK | The former Yugoslav<br>Republic of Macedonia | TM | Turkmenistan             |
| BF | Burkina Faso             | GR | Greece                                   | ML | Mali   | TR | Turkey                   |
| BG | Bulgaria                 | HU | Hungary                                  | MN | Mongolia                                     | TT | Trinidad and Tobago      |
| BJ | Benin                    | IE | Ireland                                  | MR | Mauritania                                   | UA | Ukraine                  |
| BR | Brazil                   | IL | Israel                                   | MW | Malawi                                       | UG | Uganda                   |
| BY | Belarus                  | IS | Iceland                                  | MX | Mexico                                       | US | United States of America |
| CA | Canada                   | IT | Italy                                    | NE | Niger  | UZ | Uzbekistan               |
| CF | Central African Republic | JP | Japan                                    | NL | Netherlands                                  | VN | Viet Nam                 |
| CG | Congo                    | KE | Kenya                                    | NO | Norway                                       | YU | Yugoslavia               |
| CH | Switzerland              | KG | Kyrgyzstan                               | NZ | New Zealand                                  | ZW | Zimbabwe                 |
| CI | Côte d'Ivoire            | KP | Democratic People's<br>Republic of Korea | PL | Poland                                       |    |                          |
| CM | Cameroon                 | KR | Republic of Korea                        | PT | Portugal                                     |    |                          |
| CN | China                    | KZ | Kazakhstan                               | RO | Romania                                      |    |                          |
| CU | Cuba                     | LC | Saint Lucia                              | RU | Russian Federation                           |    |                          |
| CZ | Czech Republic           | LI | Liechtenstein                            | SD | Sudan  |    |                          |
| DE | Germany                  | LK | Sri Lanka                                | SE | Sweden                                       |    |                          |
| DK | Denmark                  | LR | Liberia                                  | SG | Singapore                                    |    |                          |
| EE | Estonia                  |    |  |    |  |    |                          |

# MOBILE STATION ASSISTED TIMING SYNCHRONIZATION IN A CDMA COMMUNICATION SYSTEM

## BACKGROUND OF THE INVENTION

5

### I. Field of the Invention

The present invention relates to communication systems. More particularly, the present invention relates to a novel and improved method and apparatus for synchronizing a base station by means of signals transmitted from a mobile station which is concurrently in communication with a synchronized base station.

### 15 II. Description of the Related Art

The use of code division multiple access (CDMA) modulation techniques is but one of several techniques for facilitating communications in which a large number of system users are present. Although other techniques, such as time division multiple access (TDMA), frequency division multiple access (FDMA) and AM modulation schemes such as amplitude companded single sideband (ACSSB) are known, CDMA has significant advantages over these other modulation techniques. The use of CDMA techniques in a multiple access communication system is disclosed in U.S. Patent No. 4,901,307, entitled "SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM USING SATELLITE OR TERRESTRIAL REPEATERS" and U.S. Patent No. 5,103,459, entitled "SYSTEM AND METHOD FOR GENERATING SIGNAL WAVEFORMS IN A CDMA CELLULAR TELEPHONE SYSTEM", both of which are assigned to the assignee of the present invention and are incorporated by reference. The method for providing CDMA mobile communications was standardized in the United States by the Telecommunications Industry Association in TIA/EIA/IS-95-A entitled "Mobile Station-Base Station Compatibility Standard for Dual-Mode Wideband Spread Spectrum Cellular System", referred to herein as IS-95.

In the just mentioned patents, a multiple access technique is disclosed in which a large number of mobile station users, each having a transceiver, communicate through satellite repeaters or terrestrial base stations (also known as cell base stations or cell-sites) using code division multiple access (CDMA) spread spectrum communication signals. By using CDMA

40

communications, the frequency spectrum can be reused multiple times thus permitting an increase in system user capacity. The use of CDMA techniques result in much higher spectral efficiency than can be achieved using other multiple access techniques.

5       A method for simultaneously demodulating data that has traveled along different propagation paths from one base station and for simultaneously demodulating data redundantly provided from more than one base station is disclosed in U.S. Patent No. 5,109,390 (the '390 patent),  
10       entitled "DIVERSITY RECEIVER IN A CDMA CELLULAR COMMUNICATION SYSTEM", assigned to the assignee of the present invention and incorporated by reference herein. In the '390 patent, the separately demodulated signals are combined to provide an estimate of the transmitted data which has higher reliability than the data demodulated by any one path or from any one base station.

15       Handoffs can generally be divided into two categories- hard handoffs and soft handoffs. In a hard handoff, when a mobile station leaves an origination base station and enters a destination base station, the mobile station breaks its communication link with the origination base station and thereafter establishes a new communication link with the destination base  
20       station. In soft handoff, the mobile station completes a communication link with the destination base station prior to breaking its communication link with the origination base station. Thus, in soft handoff, the mobile station is redundantly in communication with both the origination base station and the destination base station for some period of time.

25       Soft handoffs are far less likely to drop calls than hard handoffs. In addition, when a mobile station travels near the coverage boundary of a base station, it may make repeated handoff requests in response to small changes in the environment. This problem, referred to as ping-ponging, is also greatly lessened by soft handoff. The process for performing soft handoff is  
30       described in detail in U.S. Patent No. 5,101,501, entitled "METHOD AND SYSTEM FOR PROVIDING A SOFT HANDOFF IN COMMUNICATIONS IN A CDMA CELLULAR TELEPHONE SYSTEM" assigned to the assignee of the present invention and incorporated by reference herein.

35       An improved soft handoff technique is disclosed in U.S. Patent No. 5,267,261, entitled "MOBILE STATION ASSISTED SOFT HANDOFF IN A CDMA CELLULAR COMMUNICATIONS SYSTEM", which is assigned to the assignee of the present invention and incorporated by reference herein. In the system of the '261 patent, the soft handoff process is improved by measuring the strength of "pilot" signals transmitted by each base station at

the mobile station. These pilot strength measurements are of assistance in the soft handoff process by facilitating identification of viable base station handoff candidates.

The base station candidates can be divided into four sets. The first set, referred to as the Active Set, comprises base stations which are currently in communication with the mobile station. The second set, referred to as the Candidate Set, comprises base stations whose signals have been determined to be of sufficient strength to be of use to the mobile station but are not currently being used. Base stations are added to the candidate set when their measured pilot energy exceeds a predetermined threshold  $T_{ADD}$ . The third set is the set of base stations which are in the vicinity of the mobile station (and which are not included in the Active Set or the Candidate Set). And the fourth set is the Remaining Set which consists of all other base stations.

In IS-95, a base station candidate is characterized by the phase offset of the pseudonoise (PN) sequence of its pilot channel. When the mobile station searches to determine the strength of the pilot signal from a candidate base station it performs a correlation operation wherein the filtered received signal is correlated to a set of PN offset hypotheses. The method and apparatus for performing the correlation operation is described in detail in co-pending U.S. Patent Application Serial No. 08/687,694, filed on July 26, 1996, entitled "METHOD AND APPARATUS FOR PERFORMING SEARCH ACQUISITION IN A CDMA COMMUNICATION SYSTEM", which is assigned to the assignee of the present invention and incorporated by reference herein.

The propagation delay between the base station and the mobile station is not known. This unknown delay produces an unknown shift in the PN codes. The searching process attempts to determine the unknown shift in the PN codes. To do this, the mobile station shifts in time the output of its searcher PN code generators. The range of the search shift is called the search window. The search window is centered about a PN shift hypothesis. A base station transmits to the mobile station a message indicating the PN offsets of base station pilots in its physical proximity. The mobile station will center its search window around the PN offset hypothesis.

The appropriate size of the search window depends on several factors including the priority of the pilot, the speed of the searching processors, and the anticipated delay spread of the multipath arrivals. The CDMA standards (IS-95) define three search window parameters. The searching of pilots in both the active and candidate sets is governed by Search Window "A". Neighbor Set pilots are searched over window "N" and Remaining Set

pilots over window "R". The searcher window sizes are provided below in Table 1, where a chip is  $\frac{1}{1.2288 \text{ MHz}}$ .

| SRCH_WIN_A<br>SRCH_WIN_N<br>SRCH_WIN_R | Window Size<br>(PN chips) | SRCH_WIN_A<br>SRCH_WIN_N<br>SRCH_WIN_R | Window Size<br>(PN chips) |
|--|---------------------------|--|---------------------------|
| 0                                      | 4                         | 8                                      | 60                        |
| 1                                      | 6                         | 9                                      | 80                        |
| 2                                      | 8                         | 10                                     | 100                       |
| 3                                      | 10                        | 11                                     | 130                       |
| 4                                      | 14                        | 12                                     | 160                       |
| 5                                      | 20                        | 13                                     | 226                       |
| 6                                      | 28                        | 14                                     | 320                       |
| 7                                      | 40                        | 15                                     | 452                       |

TABLE 1

Window sizing is a trade-off between search speed and the probability of missing a strong path lying outside the search window.

The base station transmits to the mobile station a message which specifies the PN hypotheses that the mobile station should search relative to its own PN offset. For example, the originating base station may instruct the mobile station to search for a pilot 128 PN chips ahead of its own PN offset. The mobile station in response sets its searcher demodulator 128 chips ahead in the output chip cycle and searches for the pilot using a search window centered about the specified offset. Once the mobile is instructed to a search a PN hypothesis to determine the resources available for performing a handoff, it is critical that the PN offset of the destination base station pilot is very close in time to the directed offset. The speed of searching is of critical importance near base station boundaries because delays in completing the necessary searches can result in dropped calls.

In CDMA systems in the United States, base station synchronization is achieved by providing each base station with a Global Positioning Satellite (GPS) receiver. However, there are cases where a base station may not be able to receive the GPS signal. For example, within subways and tunnels the GPS signal is attenuated to a degree that prohibits their use for timing synchronization of base stations or micro base stations. The present invention provides a method and system for providing timing synchronization in these circumstances where a fraction of the network is

capable of receiving a centralized timing signal and achieving timing therefrom and a portion of the base stations are not capable of receiving the centralized timing signal.

5

## SUMMARY OF THE INVENTION

The present invention is a novel and improved method and apparatus for time synchronizing a base station which is not capable of receiving a centralized timing signal in a network where some of the base stations are capable of receiving the centralized timing signal. A reference base station has timing synchronization through receipt of a centralized timing signal or other means. In the exemplary embodiment, the reference base station synchronizes using a global positioning satellite (GPS) receiver. Slave base stations lack the capacity to synchronize, because, for example, of an inability to receive the centralized timing signal.

In the present invention, a slave base station attains synchronization with a reference base station through messages transmitted from and received by a mobile station in the soft handoff region between the reference base station and the slave base station. First, the round trip delay between the mobile station and the reference base station is measured by the reference base station. Next, the slave base station searches until it acquires the signal transmitted by the mobile station, referred to as the reverse link signal. In response to the acquisition of the reverse link signal, the slave base station adjusts its timing so that the mobile station can acquire its signal, referred to as a forward link signal. This step may be unnecessary if the timing error in the slave base station is not severe.

Once the mobile station acquires the signal from the slave base station, the mobile station measures and reports the difference between the amount of time it takes a signal to travel from the reference base station to the mobile station and the amount of time it takes a signal to travel from the slave base station to the mobile station. The last measurement necessary is a measurement by the slave base station of the time difference between the time the slave base station received the reverse link signal from the mobile station the time the slave base station transmitted a signal to the mobile station.

A series of computations described in detail herein are performed upon the measured time values to determine the time difference between the slave base station and the reference base station. An adjustment of the slave base station timing is performed in accordance with these

computations. It should be noted that, in the preferred embodiment, all of the measurements mentioned are performed during the normal operation of an IS-95 CDMA communication system.

5

## BRIEF DESCRIPTION OF THE DRAWINGS

The features, objects, and advantages of the present invention will become more apparent from the detailed description set forth below when taken in conjunction with the drawings in which like reference characters  
10 identify correspondingly throughout and wherein:

FIG. 1 is a block diagram illustrating the network configuration of a wireless communication system comprising a reference base station and a slave base station;

FIG. 2 is a diagram illustrating the various transmissions between the  
15 mobile station, the synchronous base station and the asynchronous base station and the corresponding time intervals;

FIG. 3 is a flowchart illustrating the method for synchronizing a base station which is incapable of receiving a centralized timing signal;

FIG. 4 is a block diagram of the mobile station of the present  
20 invention;

FIG. 5 is a block diagram of the searcher in the mobile station of the present invention;

FIG. 6 is a block diagram of the traffic channel modulator of the mobile station of the present invention;

25 FIG. 7 is a block diagram of the base station of the present invention;

FIG. 8 is a block diagram of transmission system of the base station of the present invention; and

FIG. 9 is a block diagram of receiver system of the base station of the present invention.

30



## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

### I. Overview of Timing Error Computation

5 Referring to FIG. 1, mobile station 60 is in communication with reference base station 62, while it is roughly within the coverage area delineated by base station coverage boundary 61. Reference base station 62 is synchronized to the rest of the network by means of a central timing system  
10 such as the global positioning system (GPS). In contrast, slave base station 64 is not synchronized to the central timing system by independent means, such as the GPS available to base station 62. Base station controller 66 routes calls from the public switched telephone network (PSTN) to a base station 62 or 64 by means of a T1 line or other means. In addition, frequency  
15 synchronization is provided to slave base station 64 through T1 lines.

For short time periods, frequency synchronization can be provided with an acceptable degree of accuracy through T1 lines by methods well known in the art. However, problems are common in schemes which rely upon a T1 line for providing frequency information. These problems result  
20 in timing errors which can be corrected by use of the present invention. Because of the relationship between phase and frequency, the present invention's intermittent correction of phase will permit the utilization of a less accurate frequency sources when necessary.

Referring to FIG. 2, an illustration of the transmission and  
25 corresponding time intervals used to synchronize the timing of slave base station 64 with the synchronized timing of reference base station 62. Signal path 500 illustrates the transmission of a forward link signal from reference base station 62 to mobile station 60. The time interval over which this transmission occurs is designated as  $\tau_1$ . At mobile station 60, the start of  
30 frame transmissions on the reverse link are time aligned with the start of frame arrivals on the forward link. This time alignment is standardized in IS-95 and incorporated in hardware designed in conformance therewith. Therefore, it should be understood that methods and apparatus for performing this alignment are well known in the art.

35 Transmission 502 depicts the transmission of a reverse link frame from mobile station 60 to reference base station 62. The time for a signal 500 to travel from base station 62 to mobile station 60 ( $\tau_1$ ) is equal to the time for signal 502 to travel from base station 62 to mobile station 60 (also  $\tau_1$ ). Because base station 62 knows the time at which it transmitted signal 500

and knows the time at which it received signal 502, base station 62 can compute the round trip delay time ( $RTD_1$ ), which is the first value necessary in the computation of the time error ( $\tau_0' - \tau_0$ ).

Signal path 504 is the reverse link signal transmission from mobile station 60 traveling along a different propagation path to slave base station 64. The time which it takes signal 504 to travel from mobile station 60 to slave base station 64 is designated as  $\tau_2$ . The time at which the reverse link signal 504 reaches base station 64 is designated as  $T_2$ . The time it takes a forward link signal 506 traveling from base station 64 to mobile station 60 is also equal to  $\tau_2$ . In addition, slave base station 64 can measure the time difference between the time it received the reverse link signal from mobile station 60 and the time it transmitted its forward link signal to mobile station 60. This time difference is designated as  $RTD_2$ . Knowing these times allows for the computation of the time error ( $\tau_0' - \tau_0$ ). The method for computing the time error  $\tau_0'$  is described below.

First it can be observed from FIG. 2 that:

$$T_2 = \tau_1 + \tau_2, \text{ and} \quad (1)$$

$$\tau_1 + \Delta T = T_0' + T_2 \quad (2)$$

By manipulating the terms of equations (1) and (2), the following is observed:

$$T_2 + \Delta T = T_0' + 2 \cdot \tau_2 \quad (3)$$

$$2 \cdot \tau_2 = T_2 - T_0' + \Delta T \quad (4)$$

To simplify the notation, a new variable  $RTD_2$  is defined as:

$$RTD_2 = T_2 - T_0' \quad (5)$$

It can be seen from FIG. 2 that:

$$\tau_2 = \frac{RTD_2}{2} + \frac{\Delta T}{2} \quad (6)$$

$$T_2 = T_0 + \tau_1 + \tau_2 \quad (7)$$

Therefore,

$$T_2 - T_0 = \tau_1 + \tau_2, \text{ and} \quad (8)$$

$$RTD_2 = 2 \cdot \tau_2 - \Delta T$$

By substitution, it can be seen that the time error ( $T_0' - T_0$ ) is equal to:

$$T_0' - T_0 = \tau_1 - \tau_2 + \Delta T \quad (9)$$

$$T_0' - T_0 = \tau_1 - \left[ \frac{RTD_2}{2} + \frac{\Delta T}{2} \right] + \Delta T \quad (10)$$

$$T_0' - T_0 = \frac{RTD_1}{2} - \frac{RTD_2}{2} + \frac{\Delta T}{2} \quad (11)$$

$$T_0' - T_0 = \frac{RTD_1 + \Delta T - RTD_2}{2} \quad (12)$$

10

Once base station 64 knows the amount of its timing error ( $T_0' - T_0$ ), it adjusts its timing so as to synchronize it to the timing of base station 62. These measurements are subject to error, so, in a preferred embodiment, many of the measurements are redundantly made to assure the accuracy of the timing correction.

15

The method and apparatus for measuring each of the necessary time values in equation (12) is now described.

## II. Measurement of Round Trip Delay (RTD<sub>1</sub>)

20

FIG. 3 is a flow diagram illustrating the method of the present invention for synchronizing slave base station 64 to the timing of reference base station 62. In step 300, the synchronization method commences, with mobile station 60 in communication with reference base station 62 and within range to conduct communications with slave base station 64. In step 302, the round trip delay (RTD<sub>1</sub>) time for a signal to travel from reference base station 62 to mobile station 60 and back from mobile station 60 to reference base station 62 is measured. This is done by aligning the frame boundaries of frames being received by mobile station 60 with the frame boundaries of frames being transmitted by mobile station 60. The method and apparatus for providing this alignment is well known in the art. Thus, the round-trip delay (RTD<sub>1</sub>) is measured as the time difference between the start of frames transmitted by reference base station 62 and the start of frames received by reference base station 62 from mobile station 60.

25

30

Referring to FIG. 4, forward link frames of data from reference base station 62 are received at antenna 2 and provided through duplexer 3 to receiver (RCVR) 4. Receiver 4 downconverts, filters and amplifies the received signal and provides it to searcher 50 and traffic demodulators

35

(TRAFFIC DEMODS) 54. Searcher 50 searches for pilot channels in accordance with a neighbor list provided by reference base station 62. The neighbor list is provided as signaling data on the traffic channel from reference base station 62. A signal indicating the start of received frames from reference base station 62 is provided to control processor 55. Control processor 55 generates and provides a time alignment signal to traffic modulator 58 which aligns the start of frames transmitted from mobile station 60 with the start of frames received at mobile station 60.

Frames of data from the user of mobile station 60 are provided to traffic modulator 58 which in response to the timing signal from control processor 55 time aligns the frames transmitted through transmitter (TMTR) 56 with the frames received by mobile station 60 from reference base station 62. The reverse link frames are upconverted, filtered and amplified by transmitter 56 then provided through duplexer 3 for transmission through antenna 2.

### III. Acquisition of Mobile Station by Slave Base Station

FIG. 6 illustrates the traffic channel modulator 58 of mobile station 60. Frames of data are provided to frame formatter 200. In the exemplary embodiment, frame formatter 200 generates and appends a set of cyclic redundancy (CRC) check bits and generates a set of tail bits. In the exemplary embodiment, frame formatter 200 follows the frame format protocol standardized in IS-95 and described in detail in U.S. Patent No. 5,600,754, entitled "METHOD AND SYSTEM FOR THE ARRANGEMENT OF VOCODER DATA FOR THE MASKING OF TRANSMISSION CHANNEL INDUCED ERRORS", which is assigned to the assignee of the present invention and incorporated by reference herein.

The formatted data frame is provided to encoder 202 which encodes the data for error correction and detection. In the exemplary embodiment, encoder 202 is a convolutional encoder. The encoded data symbols are provided to interleaver 204 which reorders the symbols in accordance with a predetermined interleaving format. The reordered symbols are provided to Walsh mapper 206. In the exemplary embodiment, Walsh mapper 206 receives eight coded symbols and maps that set of symbols to a 64 chip Walsh sequence. The Walsh symbols are provided to spreading means 208 which spreads the Walsh symbols in accordance with a long spreading code. Long PN code generator 210 generates a pseudonoise (PN) sequence that

spreads the data and differentiates the data from the reverse link transmitted data from other mobile stations in the vicinity.

In the exemplary embodiment, the data is transmitted in accordance with a quaternary phase shift keying (QPSK) modulation format wherein the I and Q channels are spread in accordance with a short PN sequence. The spread data is provided to spreading means 214 and 216 which perform a second spreading operation on the data in accordance with a short PN sequence provided by PN generators ( $PN_I$  and  $PN_Q$ ) 212 and 218 respectively.

In step 304, slave base station 64 acquires the reverse link signal transmitted by mobile station 60. Base station controller 66 sends a signal to slave base station 64 indicating the PN code offset which mobile station 62 is using to spread its reverse link signal. In response to this signal from base station controller 66, slave base station 64 performs a search for mobile station 60 centered about the PN offset indicated by the signal from base station controller 66.

In the exemplary embodiment, slave base station 64 bank loads its searcher long code PN generator 106 and its short code PN generators 108 and 110 (illustrated in FIG. 9) in accordance with a signal from base station controller 66. The searcher process of slave base station 64 is described in detail further herein.

FIG. 7 illustrates the apparatus of slave base station 64. In slave base station 64, a signal from base station controller 60 indicating the PN of mobile station 60 is received. This message is provided to by control processor 100. In response thereto, control processor 100 computes the window search range centered at the specified PN offset. Control processor 100 provides the search parameters to searcher 101 and in response to those parameters slave base station 64 conducts a search for the signal transmitted by mobile station 60. The signal received by antenna 102 of slave base station 64 is provided to receiver 104 which downconverts, filters and amplifies the received signal and provides it to searcher 101. In addition, the received signal is provided to traffic demodulators 105 which demodulate the reverse link traffic data and provide that data to base station controller 60. Base station controller 66, in turn provides it to a PSTN.

FIG. 9 illustrates searcher 101 in greater detail. The demodulation of the reverse link signal is described in detail in co-pending U.S. Patent Application Serial No. 08/372,632, filed January 13, 1995, entitled "CELL SITE DEMODULATOR ARCHITECTURE FOR A SPREAD SPECTRUM MULTIPLE ACCESS COMMUNICATION SYSTEM" and in co-pending U.S. Patent Application Serial No. 08/316,177, filed September 30, 1994, entitled

## **VI. Measurement of Delay Between Transmission of Forward Link Signal From Slave Base Station and Receipt of Reverse link Signal at Slave Base Station**

5 In step 311, slave base station 64 measures the difference between the time the slave base station received the reverse link signal from mobile station 60 ( $T_2$ ) and the time the slave base station transmitted its forward link signal to mobile station 60 ( $T_1$ ). Slave base station 64 stores the PN offset at the time it transmits its forward link signal and upon detection of  
10 the reverse link signal from mobile station 60 computes the time difference  $RTD_2$ . In the exemplary embodiment, this computed time difference is provided by slave base station 64 to base station controller 66 and the computation of the timing adjustment is conducted at base station 66. It will be understood by one skilled in the art that the present invention is easily  
15 extended to the case wherein the computations are performed at the base stations or mobile stations.

## **VII. Timing Adjustment of Slave Base Station**

20 Base station controller 66, in response, performs the computation described in equation (12) and sends an indication of the necessary timing adjustment to slave base station 64. Referring back to FIG. 7, the timing adjustment signal is received by slave base station 64 at control processor 100. Control processor 100 generates and provides a control signal to timing  
25 adjustment processor 99. Timing adjustment processor 99 generates a signal which changes the time of timing source 98 by the amount indicated in the signal from base station controller 66.

## **VIII. Time Transfer When Not in Soft Handoff**

30 The above adjustment procedure is valid for the case in which a mobile station 60 is in soft handoff (i.e., when the mobile station has established links with both reference base station 62 and slave base station 64). Establishing links with both reference and slave base stations allows  
35 reference base station 62 to determine the  $RTD_1$  and slave base station 64 to determine the  $RTD_2$ . From the values of  $RTD_1$  and  $RTD_2$ , an estimate of the time error  $T_0'$  can be made. However, in accordance with one embodiment of the present invention, slave base station 64 can be synchronized with reference base station 62, as follows, when mobile station 60 is not in  
40 communication with both reference base station 62 and slave base station 64.

Assuming that a mobile station 60 is communicating with reference base station 62, the value of  $RTD_1$  can be determined as described above. In addition, mobile station 60 and reference base station 64 are preferably in communication through base station controller 66. The long PN code with which mobile station 60 spreads its reverse link transmission to the reference base station 62 is known to reference base station 62. In accordance with the present invention, reference base station 62 communicates the long PN code to the slave base station 64 through the base station controller 66. In addition, using the communication path through the base station controller 66, reference base station 62 sends to the slave base station 64 a list of values of  $RTD_1$  each being associated with one long PN code used by one mobile station 60 to spread the reverse link transmitted by mobile station 60 in communicating with reference base station 62. It should be understood that each mobile station 60 will be associated with one particular long PN code and  $RTD_1$  value. Slave base station 64 then uses the long PN code information to attempt to receive one or more of the reverse link transmissions from the mobile stations 60. Since the mobile stations 60 are not in soft handoff, the signal received by slave base station 64 from mobile stations 60 will be weak. Therefore, slave base station 64 will typically need to be accumulate a large number of PN chips in order to detect a mobile station 60 that is being serviced by reference base station 62.

Slave base station 64 searches for mobile stations 60 one at a time based upon the long PN codes that slave base station 64 received from reference base station 62. Therefore, if after a reasonable amount of time, slave base station 64 has been unsuccessful in detecting a reverse link transmission from a first mobile station 60, then slave base station 64 begins searching for a reverse link transmission from a second mobile station 60. In accordance with one embodiment of the present invention, reference base station 62 assists in determining which of the mobile stations 60 slave base station 64 is most likely to be able to detect. This is preferably done by determining the distance of the mobile stations 60 from reference base station 62. In addition, information regarding the sector from which each mobile station 60 is transmitting is used. That is, if the mobile station is at a relatively great distance from the reference station (as indicated, for example, by information attained while performing a power control algorithm), and the mobile station 60 is in a sector that is adjacent to slave base station 64, then there is a greater likelihood that mobile station 60 will be detected by slave base station 64. It should be clear that by reference base station 62 assisting in determining which mobile stations 60 are most likely to be

detected by slave base station 64, the amount of time required for slave base station 64 to detect a mobile station is reduced.

Once slave base station 64 has acquired the transmission from the mobile station over the reverse link, slave base station 64 determines the arrival time of the reverse link transmission,  $T_2$ , and obtains an estimate of  $\tau_2$  (the delay from mobile station 60 to slave base station 64) which is denoted by  $\gamma_2$ . Slave base station 64 then estimates  $T_0' = T_2 - (\gamma_2 + \tau_1) = T_2 - (\gamma_2 + \text{RTD1}/2)$ . It should be noted that  $\gamma_2$  is not directly measured. If the location of mobile station 60 is known, then  $\gamma_2$  can be estimated based upon the distance between the mobile station 60 and the slave base station 64, since the location of the slave base station is known. If the location of mobile station 60 is not known,  $\gamma_2$  can be estimated from a table of values or from a database based upon experience. That is, the path loss between mobile station 60 and slave base station 64 can be used to estimate  $\gamma_2$ . The path loss can be determined by measuring the amount of power that is transmitted and received at slave base station 64. Alternatively, the strength of the signal received at mobile station 60 (such as a pilot signal which is transmitted by slave base station 64 and received by mobile station 60) can be used to determine the path loss between mobile station 60 and slave base station 64. In such an embodiment of the present invention, mobile station 60 transmits an indication of the strength of the signal received to the slave base station over the reverse link.

The time error is equal to the value of  $\gamma_2$  minus  $\tau_2$ . Therefore, the time transfer accuracy is directly related to the accuracy of  $\gamma_2$ . The estimate typically is accurate to less than the cell radius. That is, the difference between the estimate of  $\gamma_2$  and the actual value of  $\gamma_2$  is less than the cell radius. Thus, for a cell with a radius of K miles, the timing error due to  $\tau_2$  is about 5 K  $\mu\text{s}$ .

In spite of the inaccuracy of the estimate of  $\gamma_2$ , this method of time transfer can provide better timing than can be provided by many other means, such as by the backhaul. Therefore, estimating  $\gamma_2$  in accordance with the present invention as described above can reduce the size of the search windows, and thus ensure that the windows are not excessive. The present invention also provides timing that is accurate enough that the received signals from two base stations do not arrive with the same pilot PN phase, thus allowing pilots from different origins to be distinguished.

It should also be noted that a complementary procedure may be used if mobile station 60 is communicating with slave base station 64, and not



with reference base station 64. In such a case,  $\tau_1$  needs to be estimated instead of  $\tau_2$ .

#### IX. Initialization of Slave Base Station

5 The above adjustment procedure is valid for the case in which the slave base station system time is relatively close to the reference base station system time. However, in some cases, the difference between the reference base station system time and the reference base station system time will be so  
10 great as to make this procedure invalid. For example, when the slave base station first becomes operational, the system time must be initialized. Without an external reference, the slave base station system time will be an arbitrary value. In another instance, when there is no mobile station in the region between the reference base station and the slave base station for a  
15 relatively long period of time, the slave base station system time may accumulate a significant error (i.e., drift from the reference base station system time by a significant amount) due to the oscillator which maintains the system time drifting with respect to the reference used by the reference base station. In such cases, the following initialization procedure is  
20 provided in accordance with the present invention.

When a slave base station 64 is first powers on, that slave base station 64 may not have the appropriate timing, since no time transfer has yet occurred between the slave base station 64 and any external timing reference, such as a GPS signal source or a reference base station 62. Therefore, in  
25 accordance with one embodiment of the present invention, when power is first applied to slave base station 64, the forward link to be transmitted from that slave base station is not enabled. Initial timing is preferably obtained using the backhaul, assuming that no more accurate means is available. The slave base station 64 then has a reasonable estimate as to the proper timing  
30 which is sufficient to allow the slave base station 64 to acquire timing via the reverse link method described above in section VIII. Once this has been done, slave base station 64 enables the forward link transmission at low power. If a mobile station 60 is in the soft handoff region, then the mobile station 60 reports the presence of the new pilot and time can be transferred  
35 using the more accurate soft handoff method of the

present invention, as described above. Once this is done, the forward link power of this base station can be increased to the normally operating power appropriate to the slave base station 64.

**5 WE CLAIM:**

## CLAIMS

1. A method for time synchronizing a first base station with a  
2 reference base station comprising the steps of:
  - measuring a round trip delay interval of transmissions from the  
4 reference base station to a mobile station in communication with  
thereference base station and back from the mobile station to the reference  
6 base station;
  - communicating information from the reference base station to the  
8 first base station to assist the first base station in receiving communications  
from the mobile station;
  - 10 receiving at the first base station communications transmitted by the  
mobile station and noting the time of reception;
  - 12 determining at the first base station, an estimate of the delay which  
occurs between transmission by the mobile station and reception by the first  
14 base station;
  - computing a timing correction value based upon the estimate of the  
16 delay, time of reception at the first base station of the transmission from the  
mobile station to the first base station, and the measured round trip delay  
18 interval.


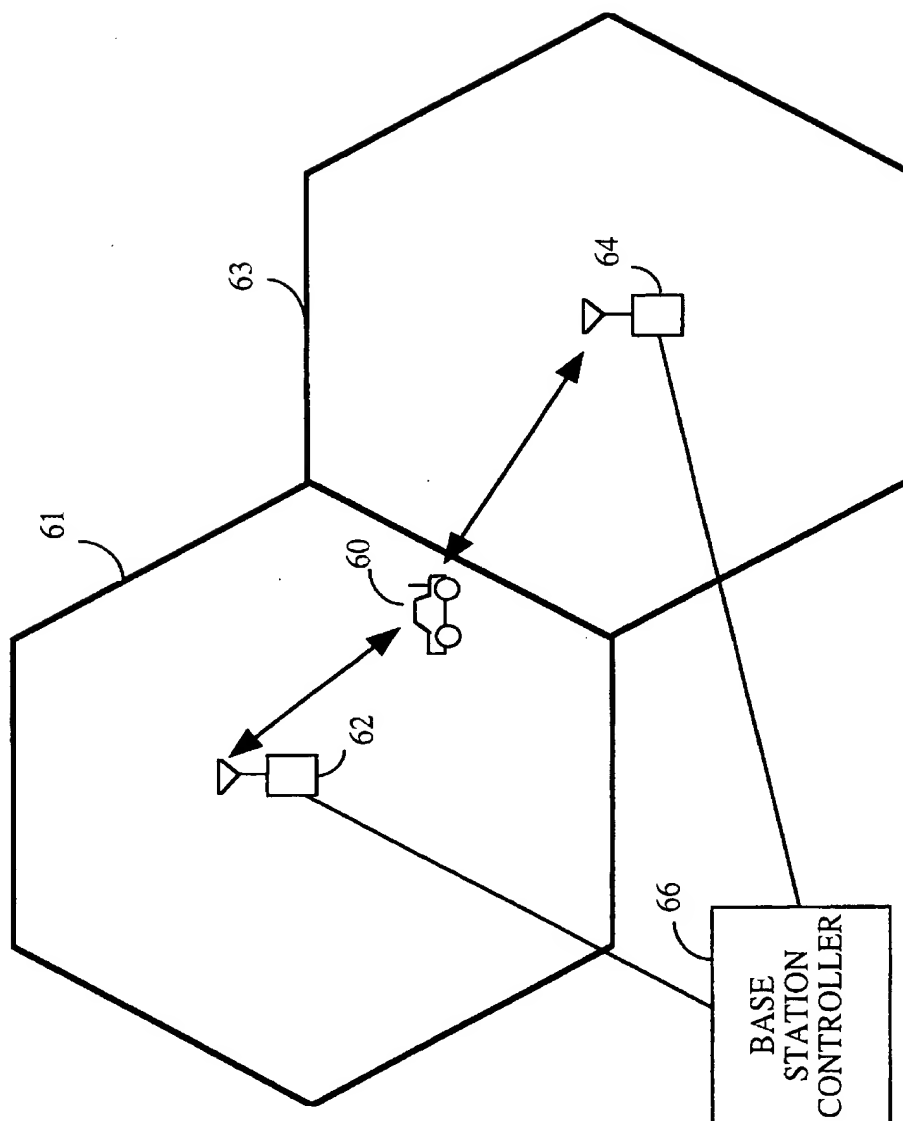


FIG. 1

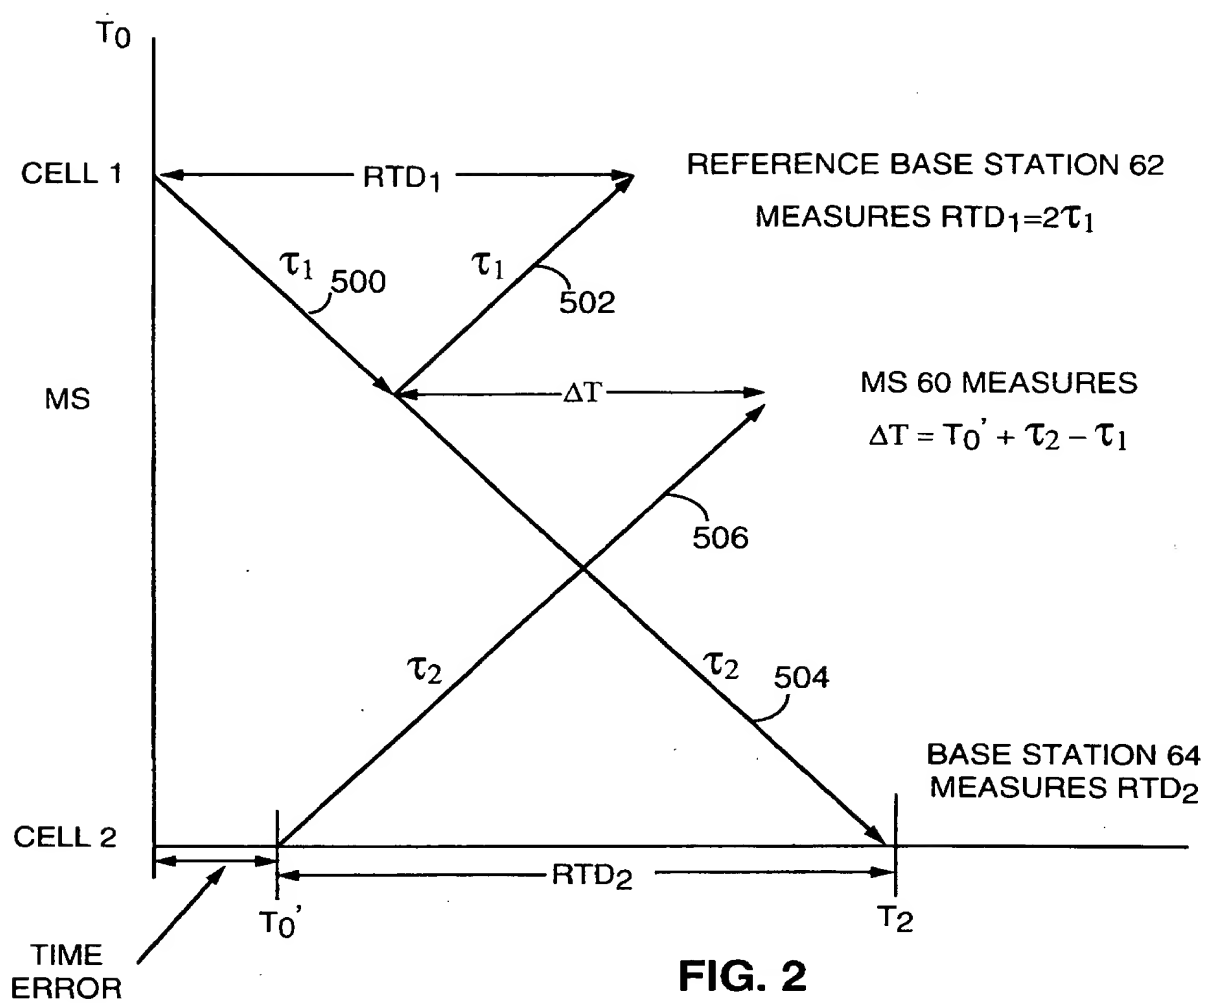

3/9

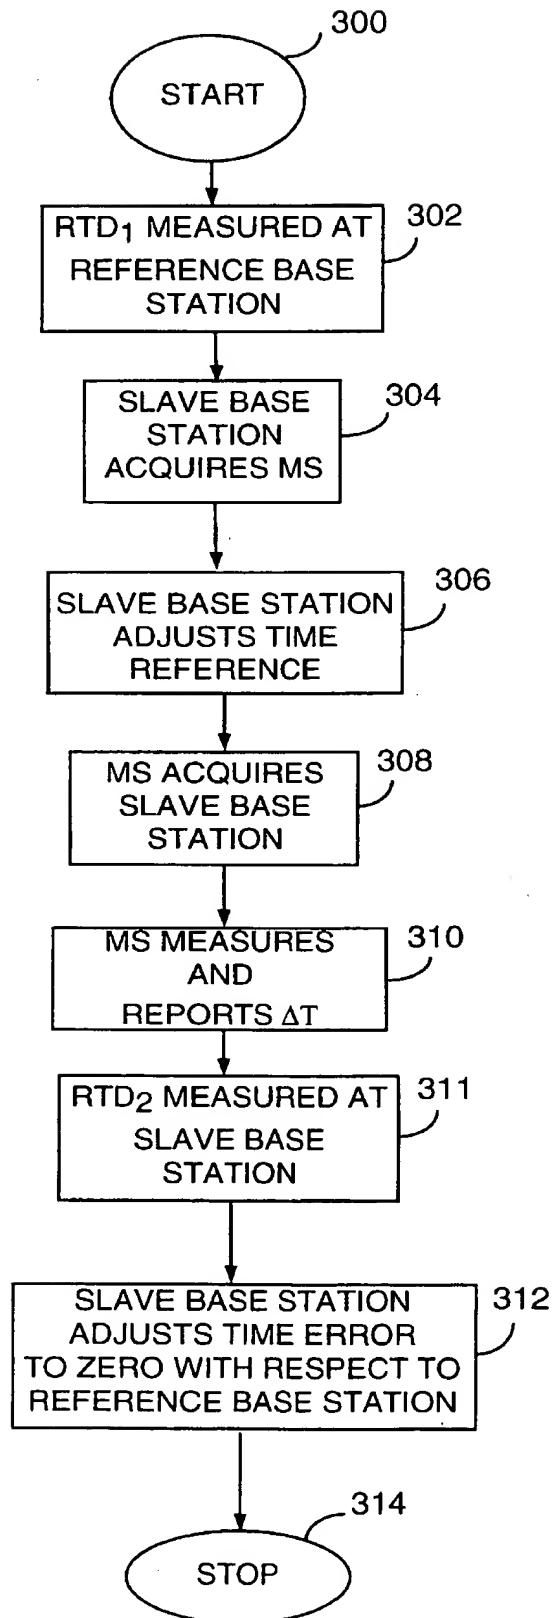


FIG. 3

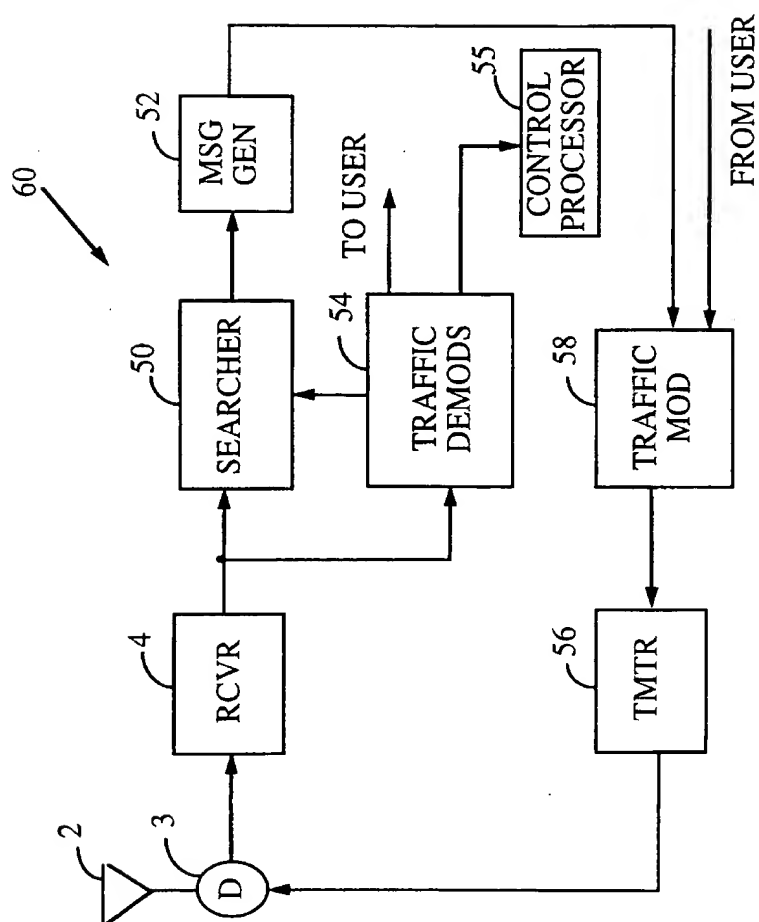


FIG. 4

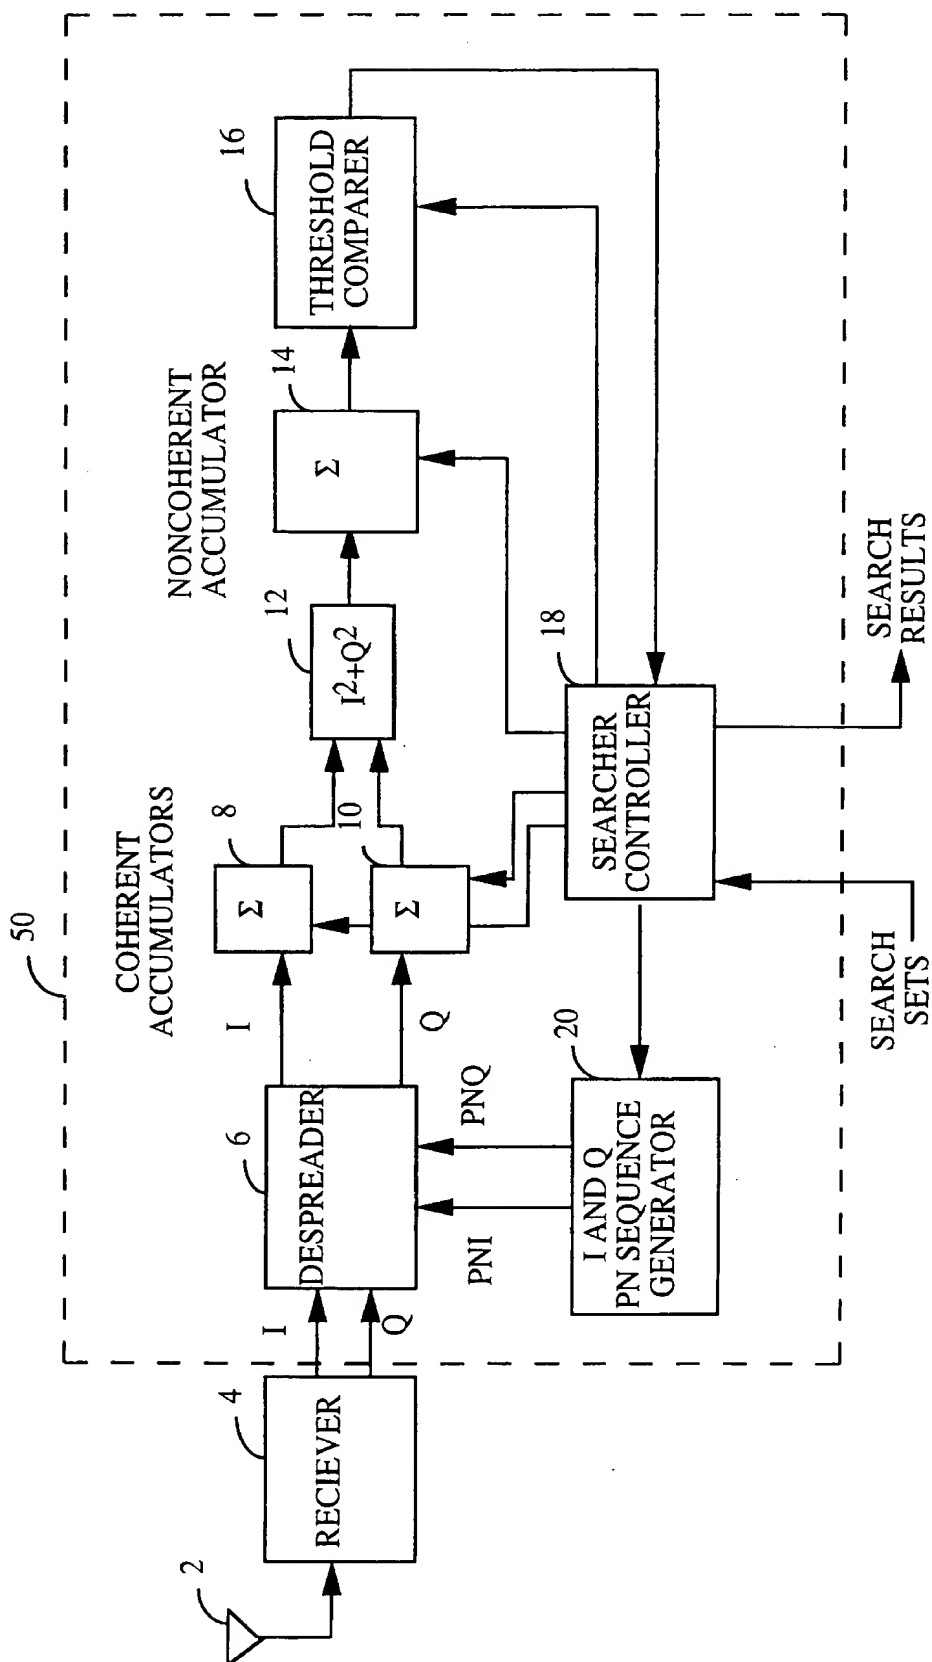


FIG. 5



6/9

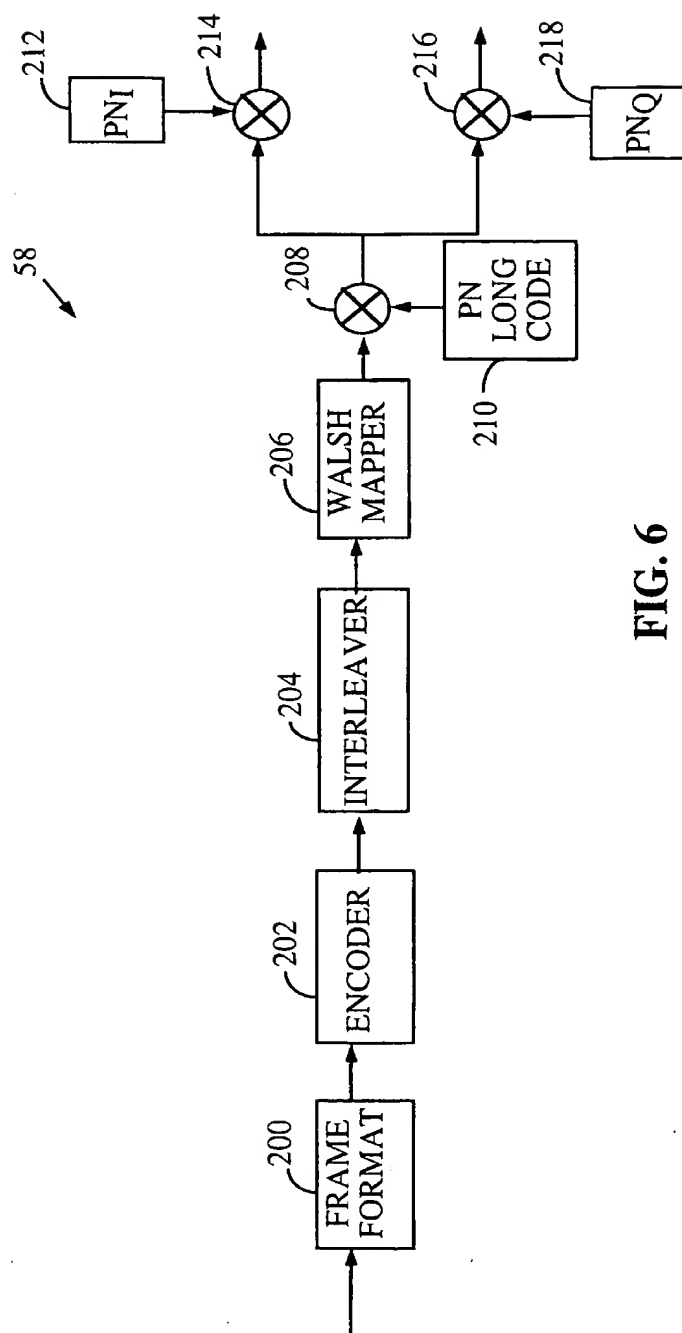


FIG. 6

7/9

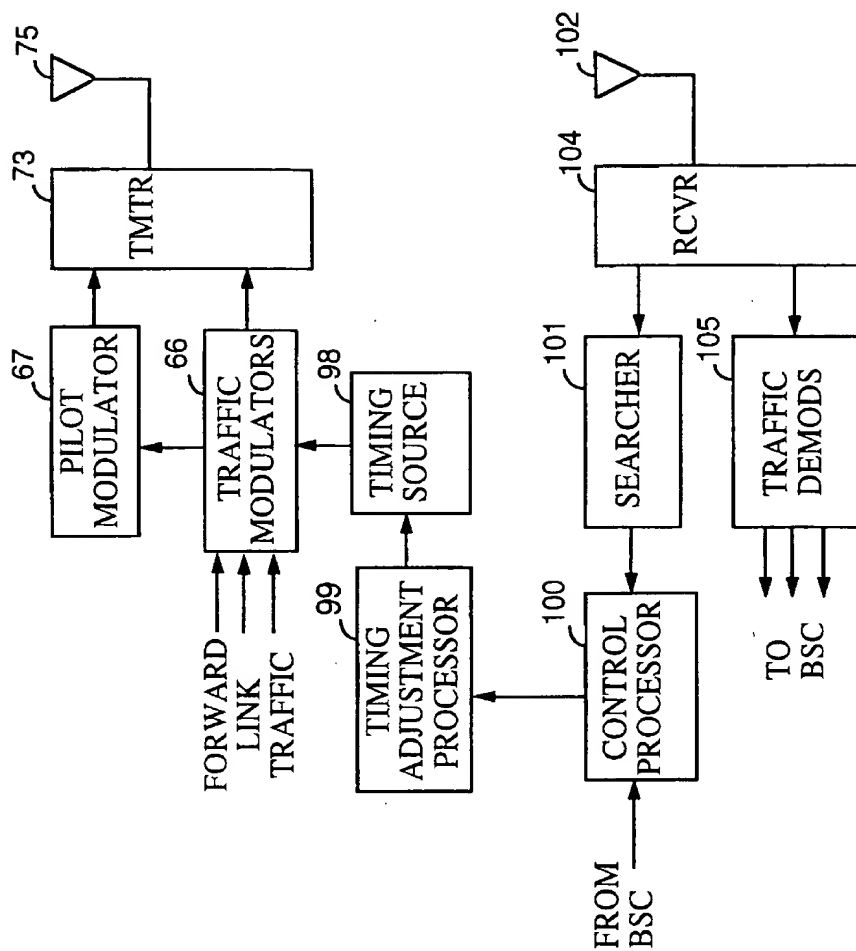


FIG. 7

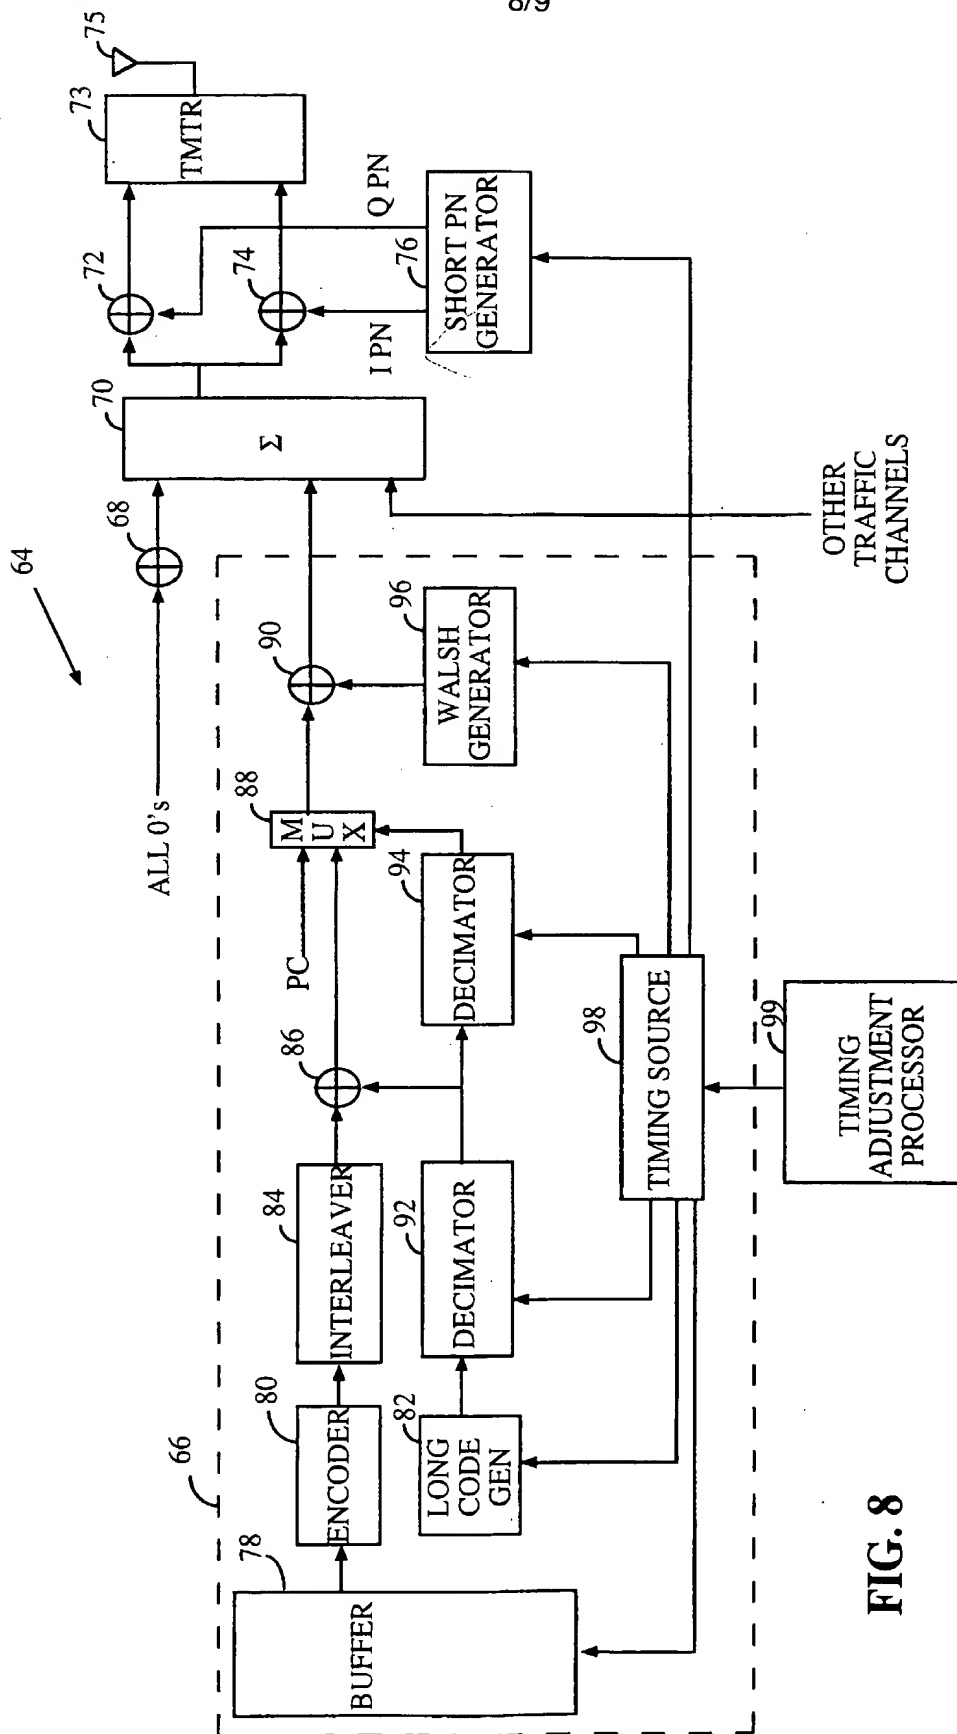


FIG. 8

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/US 99/00909

| Patent document<br>cited in search report | Publication<br>date | Patent family<br>member(s)   | Publication<br>date  |
|---|---------------------|--|--|
| WO 9430024 A                              | 22-12-1994          | AU 677079 B<br>AU 7012994 A<br>CA 2141445 A<br>CN 1112385 A<br>EP 0659326 A<br>FI 950626 A<br>JP 8500474 T<br>NZ 267747 A<br>US 5828659 A                            | 10-04-1997<br>03-01-1995<br>22-12-1994<br>22-11-1995<br>28-06-1995<br>14-02-1995<br>16-01-1996<br>27-07-1997<br>27-10-1998                             |
| EP 0766417 A                              | 02-04-1997          | FR 2739244 A<br>AU 6583296 A<br>CA 2186523 A<br>JP 9135476 A   | 28-03-1997<br>10-04-1997<br>27-03-1997<br>20-05-1997   |
| US 5677908 A                              | 14-10-1997          | JP 7284141 A<br>CA 2146493 A<br>EP 0676908 A   | 27-10-1995<br>09-10-1995<br>11-10-1995   |
| US 5519710 A                              | 21-05-1996          | JP 6338847 A<br>JP 2526803 B<br>JP 7154849 A<br>EP 0626769 A   | 06-12-1994<br>21-08-1996<br>16-06-1995<br>30-11-1994   |
| US 5101501 A                              | 31-03-1992          | AU 646421 B<br>AU 6904191 A<br>CA 2073027 A<br>CN 1051832 A<br>EP 0500775 A<br>FI 922081 A<br>IL 96219 A<br>MX 173031 B<br>NO 304210 B<br>SG 48290 A<br>WO 9107020 A | 24-02-1994<br>31-05-1991<br>08-05-1991<br>29-05-1991<br>02-09-1992<br>07-05-1992<br>12-04-1994<br>28-01-1994<br>09-11-1998<br>17-04-1998<br>16-05-1991 |

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/00909

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages   | Relevant to claim No. |
|------------|--|-----------------------|
| A          | <p>US 5 677 908 A (OURA HIDETO)<br/> 14 October 1997<br/> see abstract<br/> see column 2, line 66 - column 4, line 19<br/> see column 5, line 26-37<br/> see column 6, line 5-16<br/> see column 6, line 43 - column 7, line 9<br/> see column 8, line 2-57<br/> see column 9, line 39-54<br/> see claim 1</p> | 1                     |
| A          | <p>US 5 519 710 A (OTSUKA SHIGERU)<br/> 21 May 1996<br/> see abstract<br/> see column 1, line 34 - column 2, line 4<br/> see column 3, line 12-44<br/> see column 4, line 36-61<br/> see figure 1<br/> see claims 1,5,8-11,14</p>  | 1                     |
| A          | <p>US 5 101 501 A (GILHOUSEN KLEIN S ET AL)<br/> 31 March 1992<br/> cited in the application<br/> see column 4, line 54 - column 5, line 11</p>  | 1                     |

# INTERNATIONAL SEARCH REPORT

International Application No

PCT/US 99/00909

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 6 H04B1/707 H04B7/26

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

| Category * | Citation of document, with indication, where appropriate, of the relevant passages  | Relevant to claim No. |
|------------|---|-----------------------|
| A          | WO 94 30024 A (ERICSSON TELEFON AB L M)<br>22 December 1994<br>see page 5, line 24 - page 8, line 27<br>see page 12, line 1 - page 13, line 25<br>see page 14, line 1 - page 18, line 28<br>see figures 1,2,4,5<br>see claims 1,4,5,10-12 | 1                     |
| A          | EP 0 766 417 A (CIT ALCATEL) 2 April 1997<br>see column 2, line 57 - column 3, line 56<br>see column 5, line 58 - column 7, line 36<br>see claim 5  | 1                     |



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"A" document member of the same patent family

Date of the actual completion of the international search

16 April 1999

Date of mailing of the international search report


26/04/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Dejonghe, O

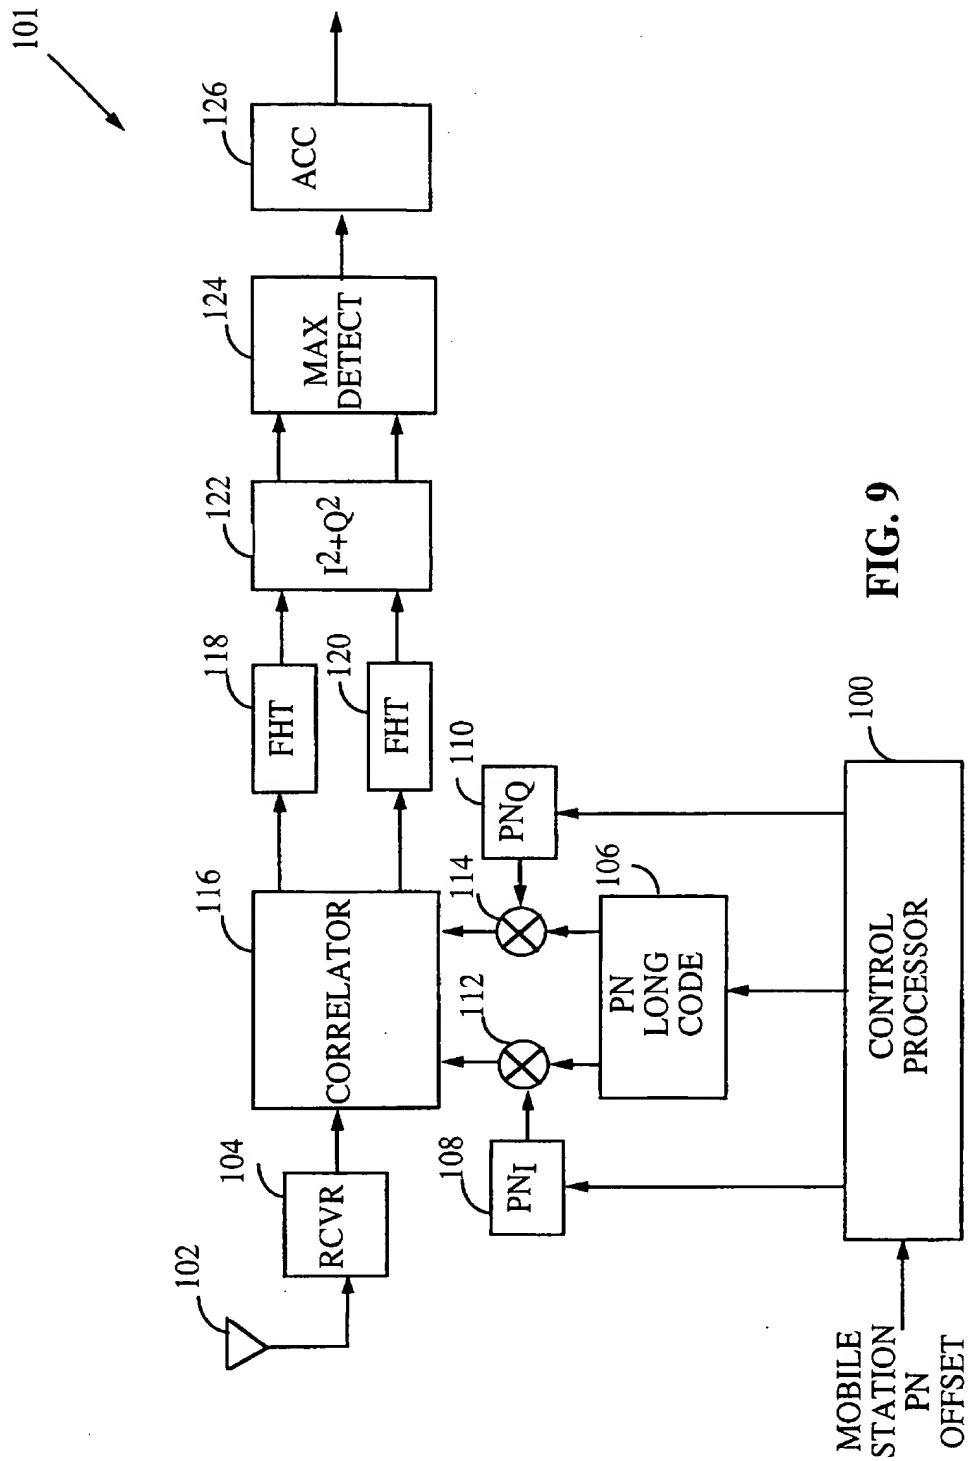

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ **BLACK BORDERS**

☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**

☒ **FADED TEXT OR DRAWING**

☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**

☐ **SKEWED/SLANTED IMAGES**

☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**

☐ **GRAY SCALE DOCUMENTS**

☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**

☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**

☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**